





## G3000 3 Lever Mortice Sashlock

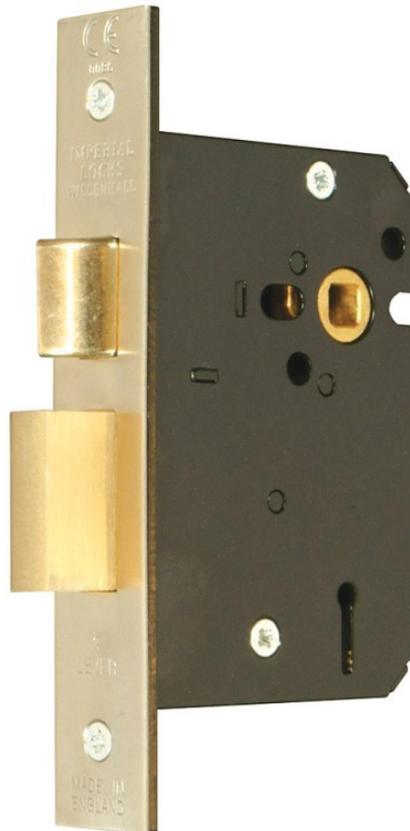

<b>Description</b>	3 Lever mortice sashlock for use on internal wooden hinged doors providing a standard level of security. CE Marked door lock Fire rated to BS EN 1634-1:2000 & Performance rated to BS EN 12209. Latchbolt operated by lever handle from either side. Deadbolt operated by key from either side. Supplied with 2 keys, striker plate and fixing screws. Finishes stainless steel (SS) or satin brass (SB). Other finishes available. 100 standard differs.
<b>Operation</b>	Latchbolt operated by lever handle from either side. Deadbolt operated by key from either side
<b>Case</b>	76mm and 101mm sizes pierced to accept 38mm centre horizontally and 38mm centre diagonally opposed bolt through fixing furniture; 63mm size pierced diagonally only
<b>Striker Plate</b>	Type A
<b>Latchbolt</b>	Brass, reversible. Projection 12mm

<b>Deadbolt</b>	Brass. Throw 16mm
<b>Follower</b>	Brass, to suit 8mm square spindle. One-way action. Sprung to suit sprung lever handle furniture. For unsprung lever handle furniture heavy duty springing should be specified
<b>Differs</b>	100 standard differs numbered 301-400
<b>Rebate Units To Suit</b>	G3051-13mm G3052-19mm G3053-25mm
<b>Box</b>	DUSTBOX1 - Sold Separately
<b>A Lock Case</b>	63mm, 76mm, 101mm
<b>B Backset</b>	45mm, 57mm, 82mm
<b>C Centres</b>	57mm, 57mm, 57mm

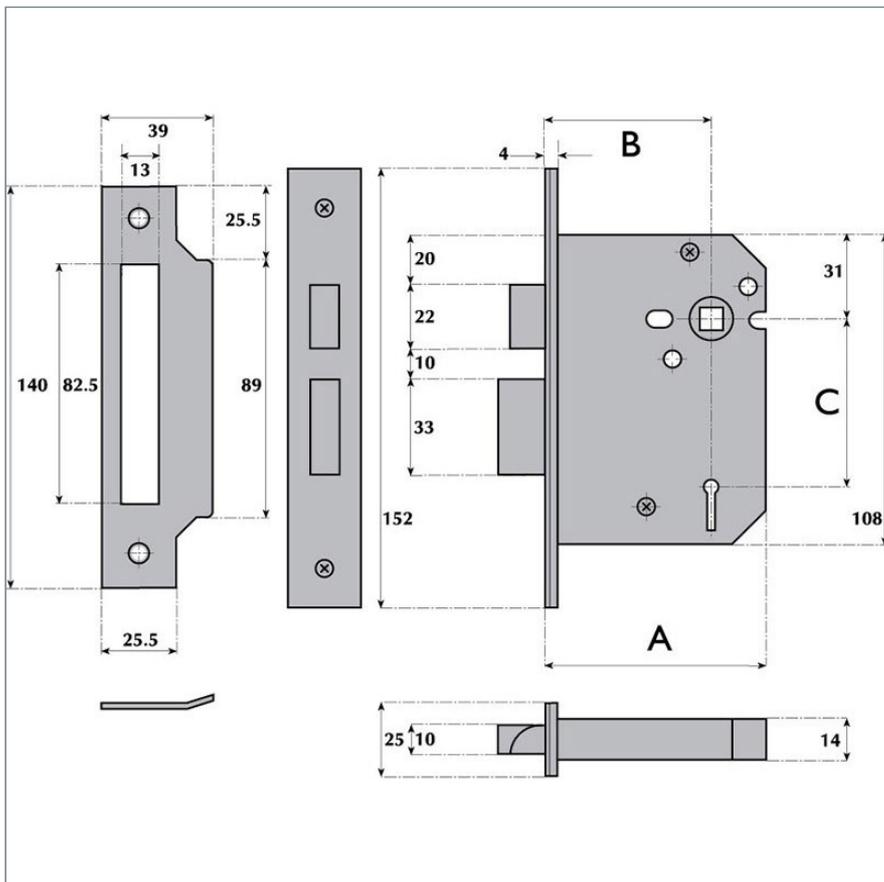

Guardian Lock & Engineering Co Ltd. Imperial Works, Wednesfield Road, Willenhall, West Midlands, WV13 1AL, United Kingdom.

+44(0)1902 635 964 | sales@imperiallocks.co.uk